

JIB-C15 series

AC Current Transducer



1. Brief introduction

JIB-C15 AC current transducer uses CT principle to measure AC current. The output signal could be standard DC signals that can be accepted by electronic circuit e.g. PLC. The primary input current and the output signal is highly electric isolated. This kind of transducer has a compact size but with a $\Phi 20\text{mm}$ aperture hole. It can be used in Power Utility, Telecom, Oil & Gas, and New energy fields.

- ★ AC current measurement ★ Good overload capacity
- ★ Good linearity ★ Galvanic isolation between primary and secondary circuit ★ Low power consumption
- ★ Compact size ★ Standard RMS signal output

2. Order information (see right chart)

Nominal Current:

10 50 100 200 300 Arms


Nominal output:

O1:DC 4-20mA O2:DC 0-5V O3:DC 0-10V

Power supply:

P1: 24Vdc P7: 12Vdc P9:15Vdc

JIB-C15-xxxPxOx

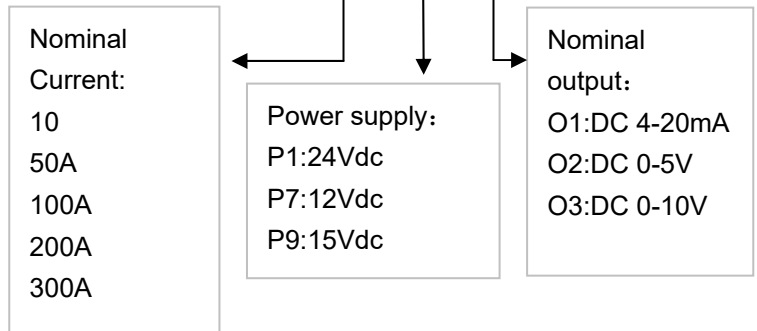


3. Electrical data

I_{pn}	Primary nominal current (Arms)	10 50 100 200 300
I_p	Primary Current, measuring range(Arms)	120% x I_{pn}
I_{oc}	Over load capacity	200% x I_{pn}
V_{sn} (for voltage output)	Secondary Voltage output	DC0-5V, DC0-10V etc
I_{sn} (for current output)	Secondary Current output	DC 4-20mA,DC 0-20mA etc
X	Accuracy ($T_a = +25^\circ\text{C}$)	$\leq 0.5\%$
EL	Linearity error	$\leq 0.2\%$
V_c	Power supply voltage	$P_n(\pm 5\%)$
V_{ofs}/I_{ofs}	Offset voltage/Offset current ($T_a = +25^\circ\text{C}$)	$\leq 20\text{mV}$ (for voltage output)/ $\leq 80\mu\text{A}$ (for current output)
T_r	Response time	$\leq 300\text{mS}$
f	Frequency bandwidth	40-200HZ
I_c	Current consumption	20mA (for current output : + I_s)
R_L	Load resistance	$>5\text{K}\Omega$ (for voltage output)/ $\leq 450\Omega$ (for current output)
V_d	Isolation test(50HZ,1min)	5KV

4. General data :


Ta	Ambient operating temperature	-25 - +70 °C
Ts	Ambient storage temperature	-45 - +85 °C
W	Mass	100g
St	Standards	IEC688:1992;EN61326
Ha	Ambient operating humidity	20-90% RH
	Case material	According to UL94-V0

5. Dimensions

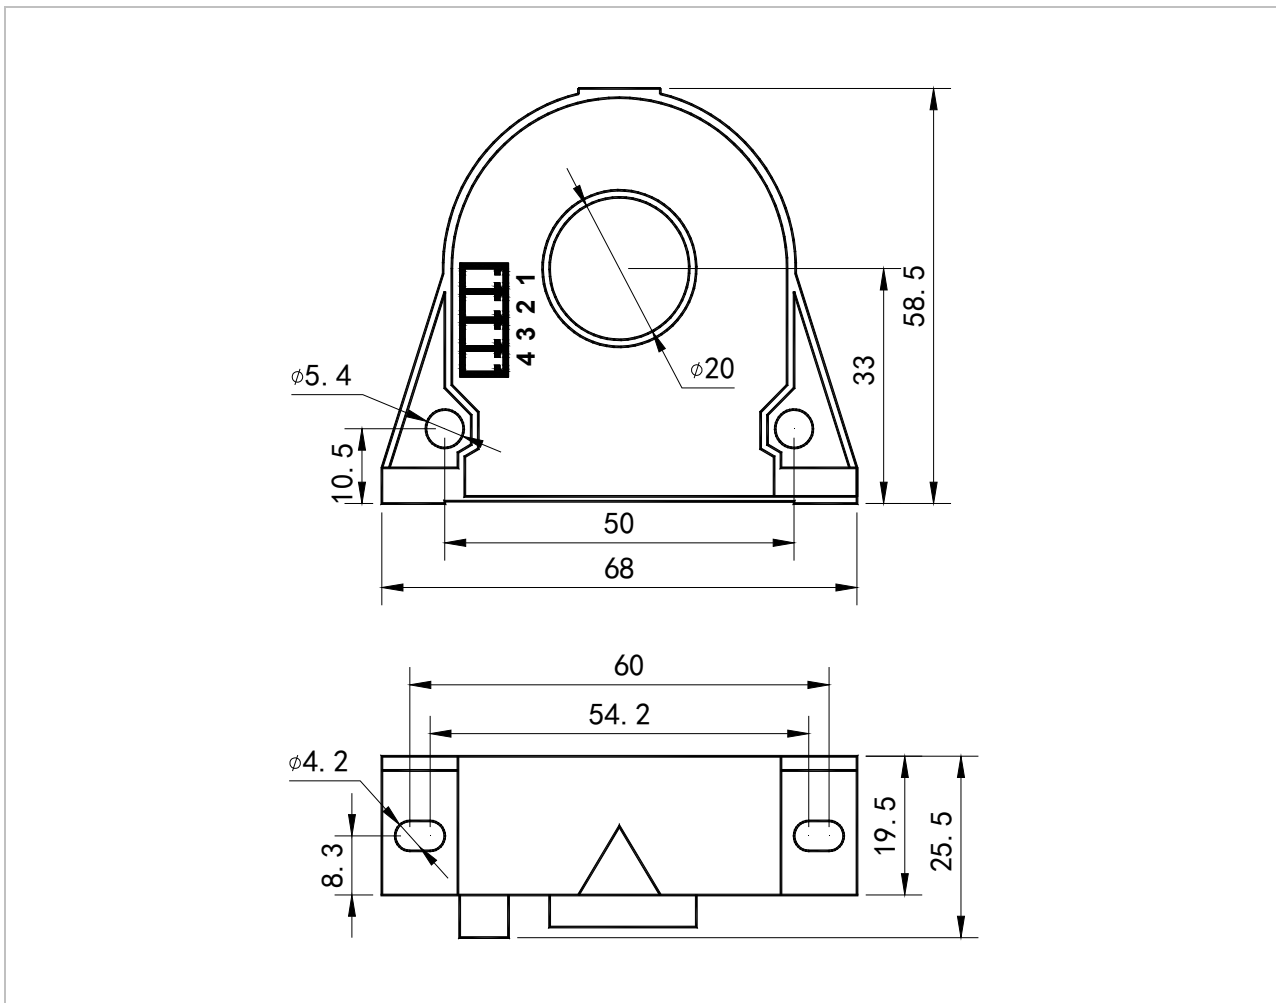




General tolerance	± 1mm	
Primary hole size	Φ20mm	
Fastening	Bottom: 2 x Φ4.2mm	Side: 2 x Φ5.4mm

6. Connection

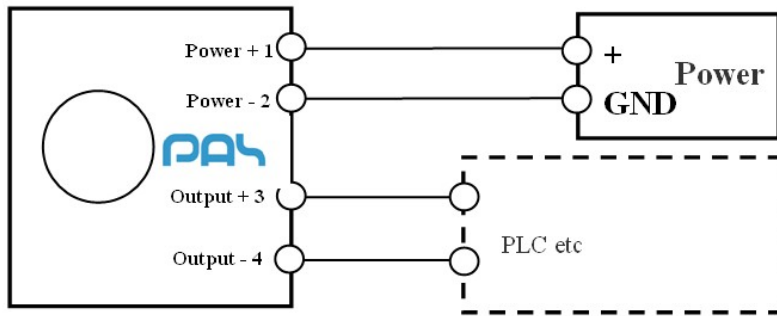

Pin	Definition
1	Supply voltage+
2	Supply Gnd
3	Output signal +
4	Output signal -

7. Output figure

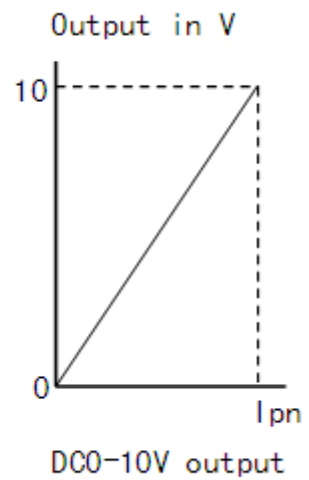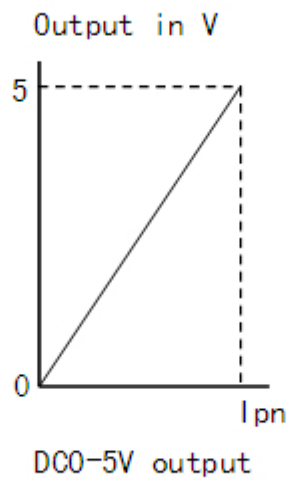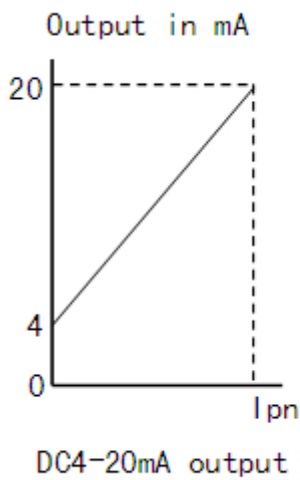

8. Safety items



1. Only qualified people can operate with such electrical products.
2. Wrong connection may destroy the products.
3. ESD protection is necessary, please follow the correct process.
4. Do not use in the environment with conductive dust and corrosive gas.
5. The Potentiometers on the product are used by PAS internal, the user can not calibrate.
6. Strong vibration and very high temperature may damage the products.



1. After the installation, the bus bar may be connected to the high voltage equipment, please do not touch the exposed parts of the transducers to avoid electric shock!

Note: 1.Passion technology company reserves the right to modify the datasheets at any time without previous notifications.
2.Any question about the datasheet, please contact our TCS.